

Henderson 503H Cleats





HENDERSON 503H CLEAT

CAST DUCTILE IRON – HOT DIPPED GALVANIZED

Dock cleats are the key to safely mooring a vessel to a dock; therefore, the cleat should always be bolted completely through the main structure of the dock. Lag screws are not recommended.

Henderson cleats are cast iron and hot dipped galvanized. We strongly recommend that pre-drilling is not done as the dimensions below may vary during the casting process.

ITEM NO.	NAME	A	B	C	Holes for Bolt Diameter	Weight
05-01	-	5"	1"	1 1/16"	#12 Round Countersunk	.29 lbs.
05-02	-	6"	1 1/8"	1 1/4"	1/4" Round Countersunk	.50
05-03z	HOLLY	8"	1 3/4"	1 3/4"	3/8" Carriage or Lag	1.50
05-04z	MAX	10"	2 1/8"	2 3/8"	3/8" Hex Recessed	2.25
05-05z	BOB	12"	2 3/8"	3 1/4"	3/8" Hex Recessed	3.25
05-05Rz	RUTH	12"	2 3/8"	3 1/4"	1/2" Hex Recessed	3.50
05-06z	BRODIE	14"	3"	3 5/8"	1/2" Hex Recessed	6.25
05-072z	DOUGLAS	18"	4"	4 1/2"	5/8" Hex Recessed	14.50

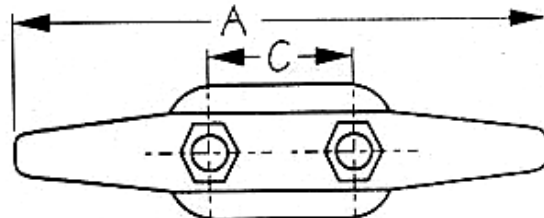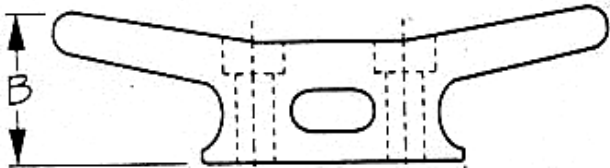

HENDERSON MARINE SUPPLY, INC.
800-523-1586 www.hendersonmarine.com

Specifications subject to change without notice. Not responsible for rust.
Liability limited to product replacement at the option of Henderson Marine Supply, Inc.
Not responsible for any inaccuracies in specifications.

Page 05-1
Last Updated: 9/2/2004 1:36:00 PM