


Miscellaneous Dock Hardware



MISCELLANEOUS DOCK HARDWARE

	ITEM NO.	NAME	DESCRIPTION
A	07-89-B	Outside Female Corner	Has two ½" welded tabs, use with a male outside corner, each leg is 10"L x 5"H
B	07-88-B	Outside Male Corner	Has one ½" welded tab, use with female outside corner to connect docks end to end, joint requires ¾" bolt set (N) or connector pin (O), each leg is 10"L x 5"H
C	07-94-B	Outside Corner End	Use this corner at ends of fingers and docks, ideal for swim floats and ski jump corners, each leg is 10"L x 5"H
D	07-93-B	Inside Corner	This heavy-duty inside corner should be used with one of the outside corners, each leg has elongated holes for easy fit-up and is 8 ¼"L x 5"H
E	07-86-B	Inside Corner/Pipe Holder 3" or 2"	These heavy-duty inside corners should be used with one of the outside corners and has an internal pipe holder to be used with either 2" pipe or 1 ½" pipe, welded gusset gives strength to the dock's frame, requires carriage bolt set (M) for attaching, measures 8 ¼"L x 5"H
F	07-90-B	Angle	Use this heavy-duty angle for all cross supports, each leg measures 2 ½"L x 5"H
G	07-96-B	Female T Connector	Has two welded ½" tabs, bolts to side of dock to attach fingers and ramps, 5"L x 5"H
H	07-95-B	Male T Connector	Has one welded ½" tab, use with female T connector to attach fingers and ramps, 5"L x 5"H, requires ¾" bolt set (N) for joint
I	07-91-B	Washer Plate	Uses two washer plates with each angle, measures 1 ½"L x 5"H
J	07-97-B	Chain Retainer	Bolts to side of dock, use weights and chains to hold dock in place, accommodates ¼", 3/8" and ½" chain, measures 5"L x 5"H
K	07-87-B	Pipe Holder/Outside 3"	Bolts to outside of dock, carriage bolt set (M) required for attaching, use 2" pipe to hold dock in place
Q	07-92Z	Back-Up Plate 5"x5"	Has 4 bolt holes, 5"L x 5"H can be used for extra support

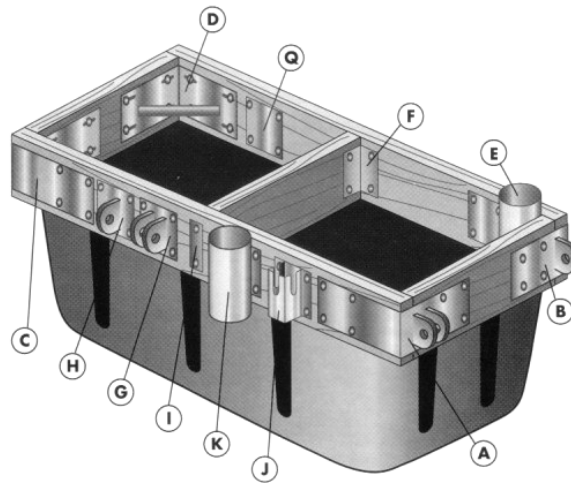