


Hex Head Lag Bolts



HEX HEAD LAG BOLTS ITEM NO. 08-xx

Hot Dipped Galvanized

When lag threads are roll formed (usual practice of smaller sizes), the unthreaded shank may be undersized. Formula for determining minimum thread length is one half the nominal screw length plus 1/2 inch.

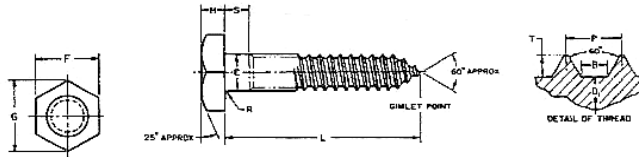

Dimensions (in.):

Nominal Size or Basic Product Diameter		Width Across Flats (F)			Width Across Corners (G)		Height (H)		
		Basic	Max	Min	Max	Min	Basic	Max	Min
1/4	0.2500	7/16	0.438	0.425	0.505	0.484	11/64	0.188	0.150
5/16	0.3125	1/2	0.500	0.484	0.577	0.552	7/32	0.235	0.195
3/8	0.3750	9/16	0.562	0.544	0.650	0.620	1/4	0.268	0.226
7/16	0.4375	5/8	0.625	0.603	0.722	0.687	19/64	0.316	0.272
1/2	0.5000	3/4	0.750	0.725	0.866	0.826	11/32	0.364	0.302
5/8	0.6250	15/16	0.938	0.906	1.083	1.033	27/64	0.444	0.378

Sizes:

BOLT DIAMETER	FROM	BOLT LENGTHS	TO
1/4"		Call for sizes.	
5/16"	1"		6"
3/8"	1"		10"
7/16"		Call for sizes.	
1/2"	1 1/2"		17"
5/8"	3"		10"
3/4"		Available by Special Order.	
7/8"		Available by Special Order.	
1"		Available by Special Order.	

Many other sizes available. Other alloys available (ex. Stainless Steel, Silicon Brass). Please call for details.



HENDERSON MARINE SUPPLY, INC.
800-523-1586 www.hendersonmarine.com
Specifications subject to change without notice. Not responsible for rust.

Page 08-3
Last Updated: 3/21/2003 10:26:00 AM