


Fire Hose Rack Assembly

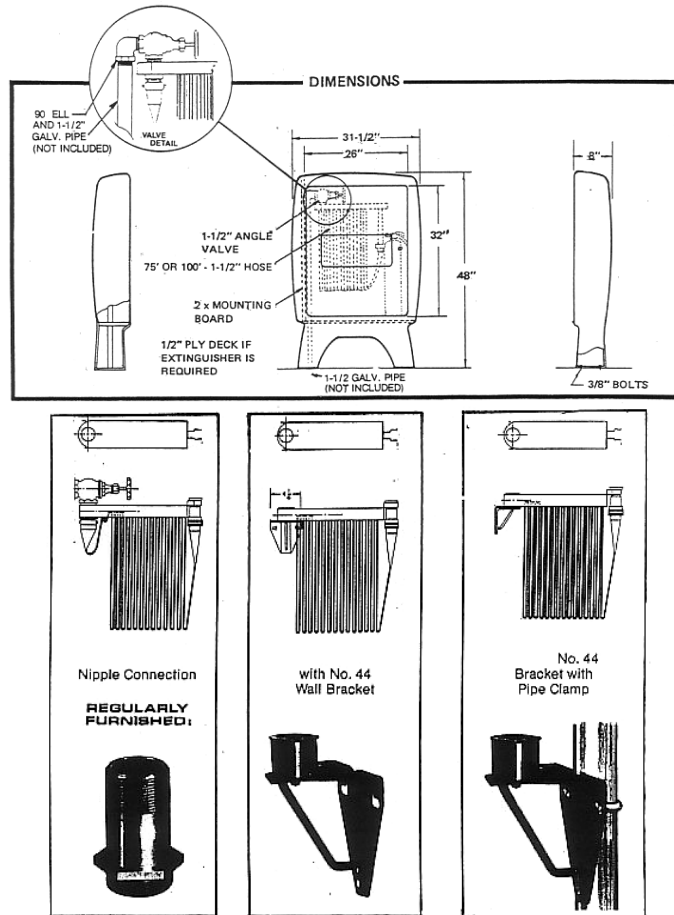

FIRE HOSE RACK ASSEMBLY ITEM NO. 13-001

1 1/2" Lined Hose with Fog Nozzle. Complete Assembly consists of rack, valve, hose and nozzle.

Used to provide an immediate and more efficient means of fire control, the assembly is capable of one-man operation and delivering the nationally recognized standard of 100 gallons per minute at 65 pounds per square inch at the nozzle. Lined hose lowers friction loss. Assembly provided Class II service and hose is a 100% polyester jacket. The tube is immune to ozone, mildew and rot.

Regularly furnished: Brass 300 lb. double female angle valve, red enamel steel hose rack, FM lined PR-Flex hose tested 500 PSI, cast brass hose rack nipple, brass pin lug coupling and plastic fog nozzle.

ITEM NO.	HOSE LENGTH	VALVE SIZE	HOSE DIAM.	HOSE TYPE	HEIGHT	WIDTH	DEPTH
13.001.1	100 Feet	1 1/2"	1 1/2"	Lined	31"	21"	4"
13.0011.1	75 Feet	1 1/2"	1 1/2"	Lined	26"	21"	4"
13.0012.1	50 Feet	1 1/2"	1 1/2"	Lined	23.5"	21"	4"



HENDERSON MARINE SUPPLY, INC.
 800-523-1586 www.hendersonmarine.com
 Specifications subject to change without notice. Not responsible for rust.

Page 13-4
 Last Updated: 5/25/2004 12:50:00 PM