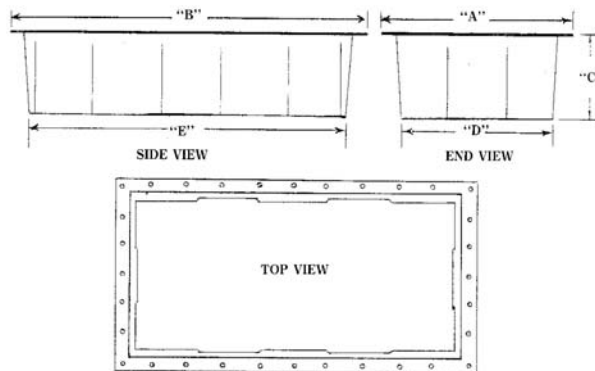
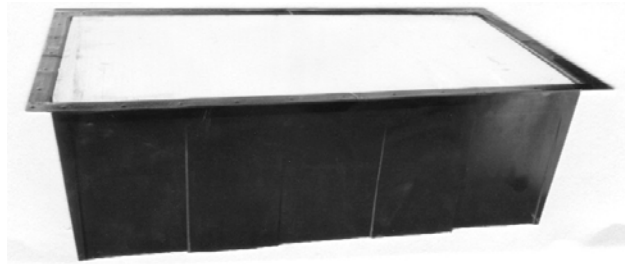

Cross-linked Polyethylene Pontoons



CROSS-LINKED POLYETHYLENE PONTOON

Features:

- Lightweight pontoon with a thirty-year life expectancy. Stiffening ribs add rigidity.
- Constructed of cross-linked polyethylene - a superior material for the demanding marina environment.
- Manufactured by rotation molding process that offers uniform wall thickness throughout the entire pontoon – no thin spots.
- Black color for maximum resistance to ultraviolet degradation.
- Indentation in the flange provided to mark suggested hole locations.
- Nestable for economical shipping and storage.
- Available with or without polystyrene foam core.
- Available with or without plywood lid.

Production order requires approximately four to six weeks for delivery. Minimum quantity production is ten per size. Less than minimum quantity production will require a set up charge.

Please see page 01-3 for **Foam Core** details. For the pontoon lid, we recommend our **Skidguard Plywood** – please see catalog page 20-1.

For application, we recommend our **“Fastap Plus”** screws found on page 08-6. According to the manufacturer, these screws have a duracoat coating that protects against rust and outlasts any galvanizing process by at least 8 to 1. They are self-drilling and self countersinking.



Cross-linked Polyethylene Pontoons

Specifications and Ordering Information:

ITEM NO.	MODEL NO.	WALL THICKNESS	DIM A	DIM B	DIM C	DIM D	DIM E	FOAM CORE CUBIC FT.	GROSS BUOYANCY	PONTOON WEIGHT
01-09	H3668A	.125 in.	36"	68"	15"	29"	61"	15.36	921 lbs.	40 lbs.
01-10	H3668A	.187	36"	68"	15"	29"	61"	15.36	921	40
01-11	H3668A	.200	36"	68"	15"	29"	61"	15.36	921	40
01-12	H3668B	.125	36"	68"	17"	29"	61"	16.89	1013	42
01-13	H3668B	.187	36"	68"	17"	29"	61"	16.89	1013	42
01-14	H3668B	.200	36"	68"	17"	29"	61"	16.89	1013	42
01-15	H3668C	.125	36"	68"	21"	29"	61"	20.99	1259	49
01-16	H3668C	.187	36"	68"	21"	29"	61"	20.99	1259	49
01-17	H3668C	.200	36"	68"	21"	29"	61"	20.99	1259	49
01-18	H4860A	.125	48"	60"	15"	41"	53"	18.49	1109	44
01-19	H4860A	.187	48"	60"	15"	41"	53"	18.49	1109	44
01-20	H4860A	.200	48"	60"	15"	41"	53"	18.49	1109	44
01-21	H4872A	.125	48"	72"	15"	41"	65"	22.71	1363	51
01-22	H4872A	.187	48"	72"	15"	41"	65"	22.71	1363	51
01-23	H4872A	.200	48"	72"	15"	41"	65"	22.71	1363	51
01-24	H4872B	.125	48"	72"	17"	41"	65"	25.84	1550	54
01-25	H4872B	.187	48"	72"	17"	41"	65"	25.84	1550	54
01-26	H4872B	.200	48"	72"	17"	41"	65"	25.84	1550	54
01-27	H4872C	.125	48"	72"	21"	41"	65"	31.04	1862	55
01-28	H4872C	.187	48"	72"	21"	41"	65"	31.04	1862	55
01-29	H4872C	.200	48"	72"	21"	41"	65"	31.04	1862	55
01-30	H4896A	.125	48"	96"	15"	41"	89"	30.79	1847	62
01-31	H4896A	.187	48"	96"	15"	41"	89"	30.79	1847	62
01-32	H4896A	.200	48"	96"	15"	41"	89"	30.79	1847	62
01-33	H4896B	.125	48"	96"	17"	41"	89"	35.04	2102	69
01-34	H4896B	.187	48"	96"	17"	41"	89"	35.04	2102	69
01-35	H4896B	.200	48"	96"	17"	41"	89"	35.04	2102	69
01-33.3	H4896C	.125	48"	96"	21"	41"	89"	42.74	2564	70
01-33.4	H4896C	.187	48"	96"	21"	41"	89"	42.74	2564	70
01-33.5	H4896C	.200	48"	96"	21"	41"	89"	42.74	2564	70

